
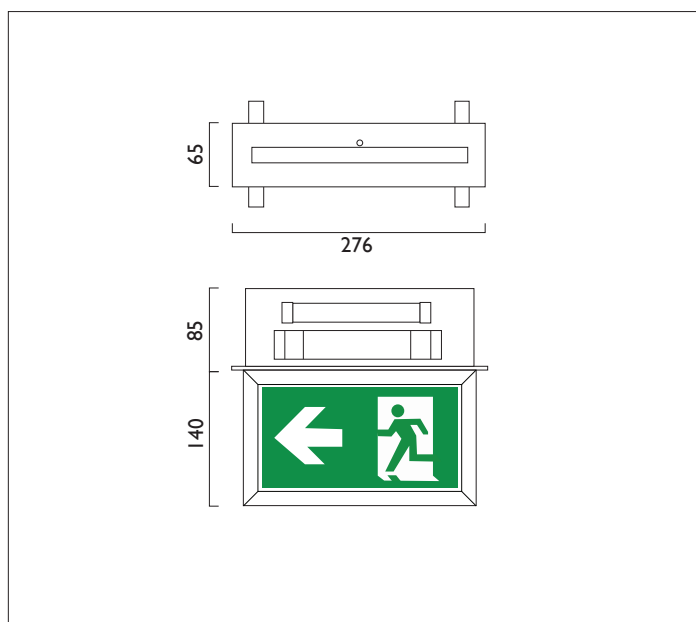


LEDEX R

LEDEX R ceiling recessed high quality aluminium extrusion body finished in white. To specify add directional sign panel. Comply with BS EN60958.2.22.

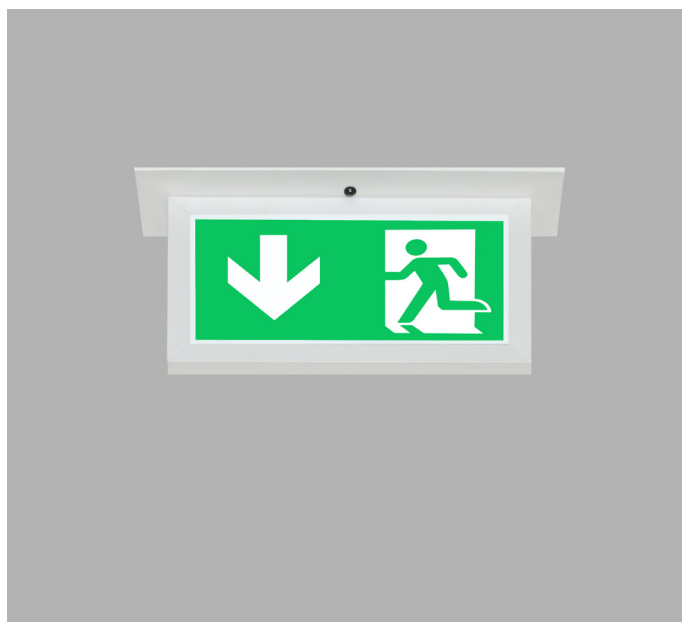

Product Number	D8200
Double Sided Legend	suffix / DS
Lamp Type	LED
Luminance	>500cd/m
Operation	Non-maintained, maintained or switched maintained
Source	10 x 3 chip white LED's
Battery	6.4V 1.5 Ah Li-Fe
Charge current	150mA nominal
Recharge period	24 hours (14 hrs for 1 hr duration)
Input voltage	230V +/-10% ~ 50Hz
Power	4.8W / 8.0VA
Construction	Aluminium / Steel / Plastic
Finish	White (RAL 9010)
IP	IP20
Control	DALI Driver

/suffix	Legend	Direction
/ECAR	EC Format	Arrow Right
/ECAL	EC Format	Arrow Left
/ECAD	EC Format	Arrow Down
/ISOAR	ISO Format	Arrow Right
/ISOAL	ISO Format	Arrow Left
/ISOAU	ISO Format	Arrow Up

