
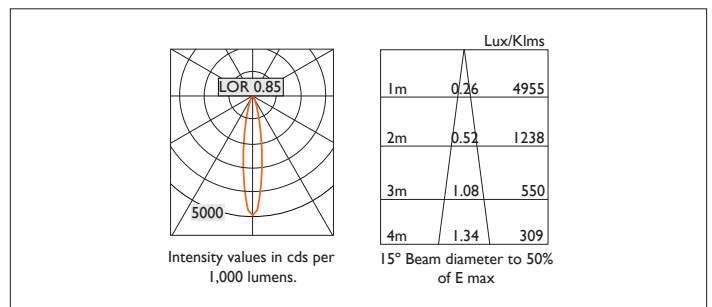
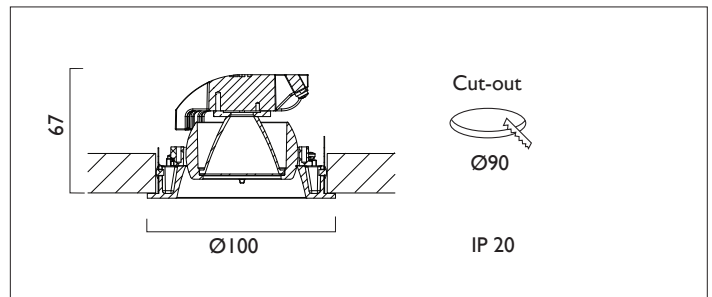


QUINTA C100 ROUND FIXED

QUINTA C100 ROUND FIXED Recessed downlighter with a one-piece combined reflector and ceiling trim in white and a choice of beam distribution.

Overall diameter 100mm, cut out 90mm diameter.
3 Step MacAdam LED.

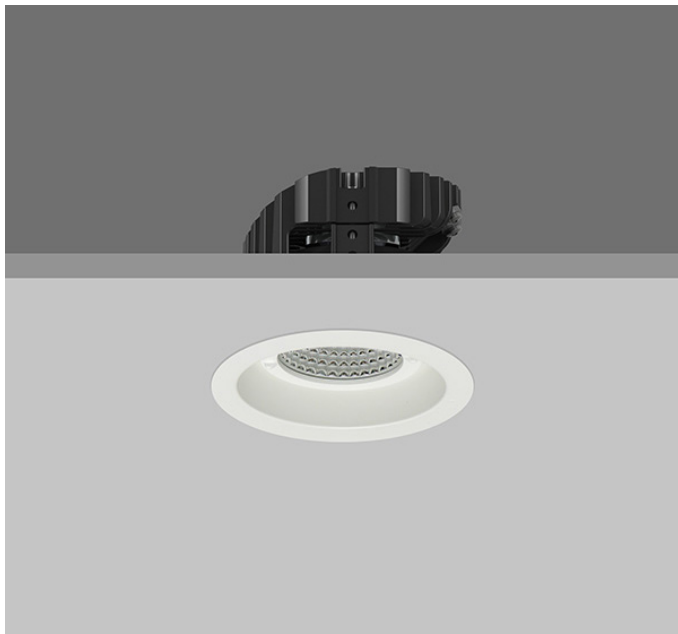

| | |
|----------------|--------------------------|
| Product Number | G1120/*Light Engine |
| Lamp Type | LED, Ra 80, 50,000 hours |
| Reflector | Silver |
| Beam Angle | 15° |
| Construction | Aluminium / Steel |
| Finish | White RAL 9010 |
| IP | IP20 |
| Control | Driver |

*Light Engine Specification

| | | | | | |
|-------|-------|-------|---------|------|----------|
| 081 2 | 2700K | 200mA | 817 lms | 6.6W | 123 lm/W |
| 085 3 | 3000K | 200mA | 856 lms | 6.6W | 129 lm/W |
| 089 5 | 4000K | 200mA | 895 lms | 6.6W | 135 lm/W |

- 0 No Emergency
 - E Maintained Emergency
 - N Non Maintained
-
- 0 Fixed Non Dimmable
 - 7 Lead / Trailing

| | | | | | |
|-------|-------|-------|----------|------|----------|
| 095 2 | 2700K | 250mA | 959 lms | 8.3W | 115 lm/W |
| 100 3 | 3000K | 250mA | 1004 lms | 8.3W | 120 lm/W |
| 105 5 | 4000K | 250mA | 1051 lms | 8.3W | 126 lm/W |

- 0 No Emergency
 - E Maintained Emergency
 - N Non Maintained
-
- 1 1-10V
 - 5 DALI
 - 9 Addressable Inverter & Driver

EN 60598-1
WEE/AE0290TY

