



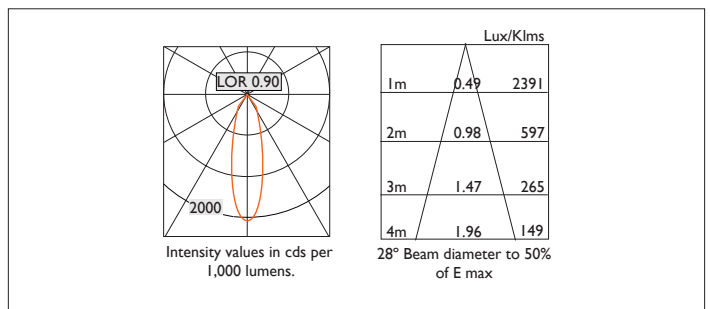

Ambiance L73 Directional

AMBIANCE L73 DIRECTIONAL Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. 0-25° tilt. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

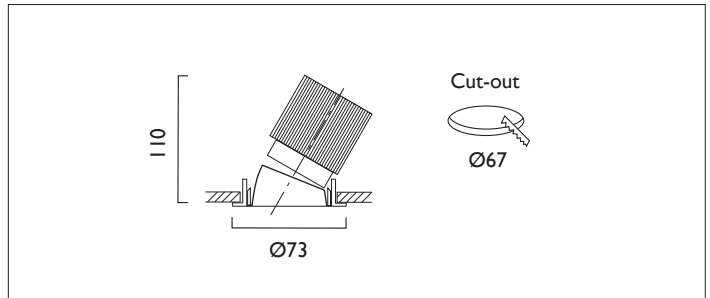

| | |
|----------------|------------------------------------|
| Product Number | C0238/*Engine |
| Lamp Type | 3 Step MacAdam LED, Up to 1084 lms |
| Reflector | Spectro Silver |
| Beam Angle | 28° |
| Construction | Aluminium / Steel |
| Ceiling Trim | White RAL 9010 |
| IP | IP20 |
| Control | Driver |

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

| | | | | | |
|-------|-----|--|------|---------|-------|
| 090 | --- | 904 lm | 6.2W | 145lm/W | 180mA |
| 100 | --- | 1084 lm | 7.8W | 128lm/W | 220mA |
| 2700K | 2 | <ul style="list-style-type: none"> 0 No Emergency E Maintained Emergency 1 1-10V 5 DALI 7 Lead / Trainling 9 Addressable Inverter & Driver | | | |
| 3000K | 3 | | | | |
| 4000K | 5 | | | | |
| | | | | | |
| | | | | | |

Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DAL quotes mean average lumens for L and C products.

