




MINITRIM X86 DIRECTIONAL

MINITRIM X86 DIRECTIONAL Round recessed downlighter with no separate ceiling trim, a choice of deep reflector and beam distribution. 0-25° tilt, 340° rotation. Overall diameter 86mm, cut out 81.5mm. Xicato LED.

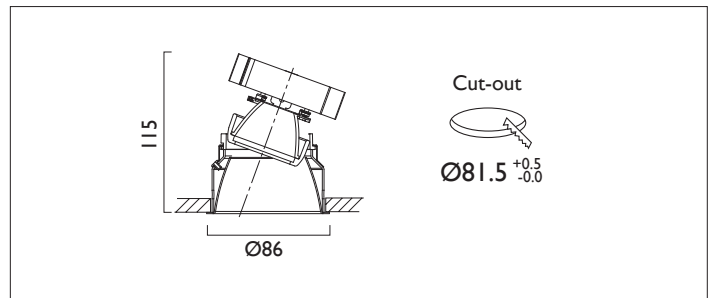

| | |
|----------------|-------------------------------|
| Product Number | D6123/*Engine |
| Lamp Type | Xicato LED, Up to 1300 lumens |
| Reflector | Black |
| Beam Angle | 20° |
| Construction | Aluminium / Steel |
| IP | IP20 |
| Control | Driver |

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

*Light Engine Specification

Xicato 9mm XTM 50,000 hours >Ra80

| | | | | | |
|-----|-----|---------|-------|---------|-------|
| 07A | --- | 720 lm | 7.4W | 97 lm/w | 350mA |
| 09A | --- | 965 lm | 10.9W | 89 lm/w | 500mA |
| 13A | --- | 1300 lm | 15.6W | 83 lm/w | 700mA |

| | | |
|-------|---|--|
| 2700K | 2 | <ul style="list-style-type: none"> 0 No Emergency E Maintained Emergency |
| 3000K | 3 | |
| 3500K | 4 | |
| 4000K | 5 | |
| | | |

EN 60598-1
WEE/AE0290TY

