




# MINITRIM X86 DIRECTIONAL IP44

MINITRIM X86 DIRECTIONAL IP44 Round recessed down-lighter with no separate ceiling trim, a choice of deep reflector and beam distribution. 0-25° tilt, 340° rotation. Overall diameter 86mm, cut out 81.5mm. Xicato LED.

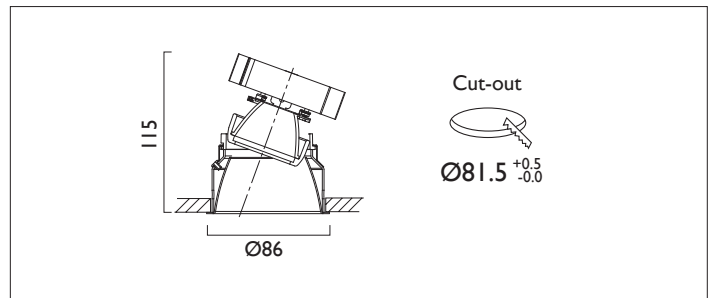

Product Number	D6223/*Engine
Lamp Type	Xicato LED, Up to 1300 lumens
Reflector	Black
Beam Angle	20°
Construction	Aluminium / Steel / Plastic
IP	IP44
Control	Driver

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

\*Light Engine Specification  
Xicato 9mm XTM 50,000 hours >Ra80

07A	---	720 lm	7.4W	97 lm/w	350mA
09A	---	965 lm	10.9W	89 lm/w	500mA
13A	---	1300 lm	15.6W	83 lm/w	700mA

2700K	2	<ul style="list-style-type: none"> <li>0 No Emergency</li> <li>E Maintained Emergency</li> </ul>
3000K	3	
3500K	4	
4000K	5	
		<ul style="list-style-type: none"> <li>0 Fixed Output</li> <li>1 I-10V</li> <li>3 DSI</li> <li>5 DALI</li> <li>7 Lead / Trailing</li> <li>9 Addressable</li> </ul>

