

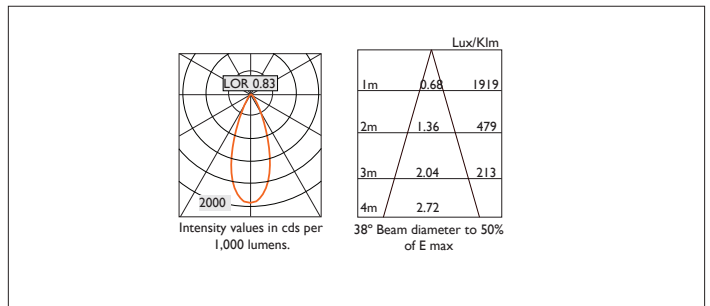


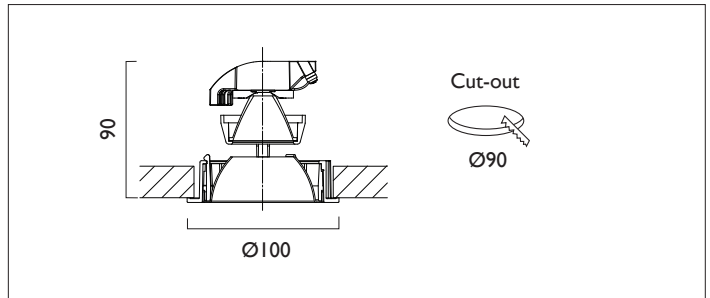

AMBIANCE LI00

AMBIANCE LI00 FIXED Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. Overall diameter 100mm, cut out 90mm diameter. 3 Step MacAdam LED.

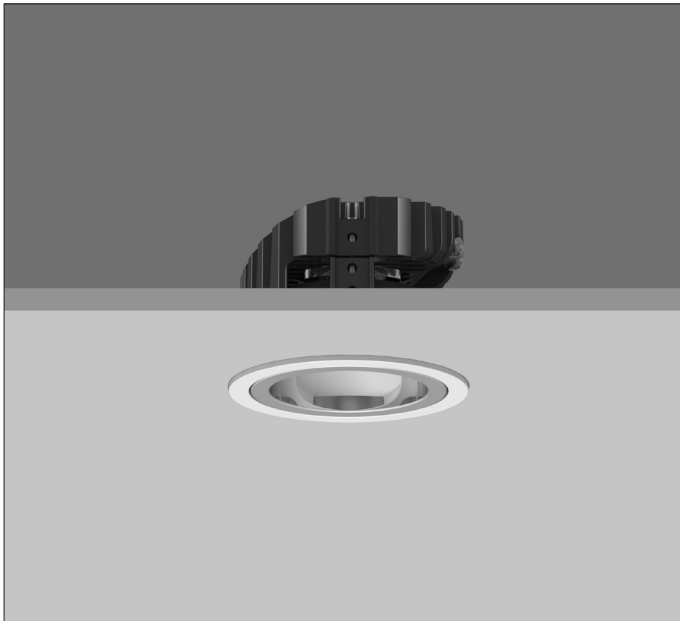

| | |
|----------------|---------------------------------------|
| Product Number | C0941/*Engine |
| Lamp Type | 3 Step MacAdam LED, Up to 1257 lumens |
| Reflector | Specular Silver |
| Beam Angle | 38° |
| Construction | Aluminium / Steel |
| Ceiling Trim | White RAL 9010 |
| IP | IP20 |
| Control | Driver |

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

*Light Engine Specification
3 STEP MacADAM 50,000 hours >Ra80

| | | | | |
|-----|---------|------|---------|-------|
| 090 | 904 lm | 6.2W | 145lm/W | 180mA |
| 100 | 1084 lm | 7.8W | 128lm/W | 220mA |
| 120 | 1257 lm | 9.3W | 129lm/W | 260mA |

| | | | |
|-------|---|---|-------------------------------|
| 2700K | 2 | 0 | No Emergency |
| 3000K | 3 | E | Maintained Emergency |
| 4000K | 5 | 0 | Fixed Non Dimmable |
| | | 1 | 1-10V |
| | | 5 | DALI |
| | | 7 | Lead / Trailing |
| | | 9 | Addressable Inverter & Driver |
| | | E | Maintained Emergency |

Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DALI quotes mean average lumens.

