



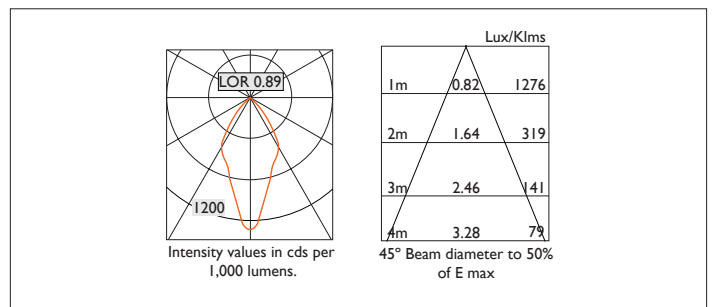

# Ambiance L73

AMBIANCE L73 FIXED Round recessed downlighter with standard white ceiling trim and a choice of deep cone reflector finish and beam distribution. Overall diameter 73mm, cut out 67mm diameter. 3 Step MacAdam LED.

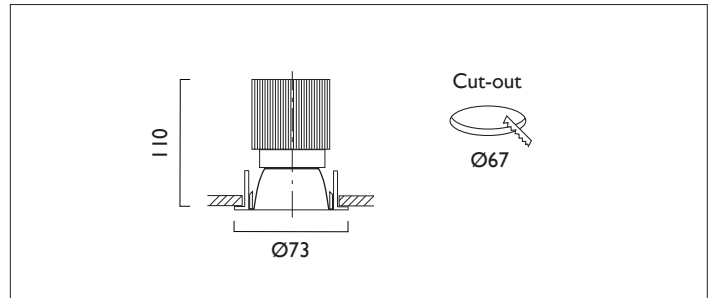

|                |                                    |
|----------------|------------------------------------|
| Product Number | C0153/*Engine                      |
| Lamp Type      | 3 Step MacAdam LED, Up to 1084 lms |
| Reflector      | Black                              |
| Beam Angle     | 45°                                |
| Construction   | Aluminium / Steel                  |
| Ceiling Trim   | White RAL 9010                     |
| IP             | IP20                               |
| Control        | Driver                             |

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

\*Light Engine Specification

3 STEP MacADAM 50,000 hours >Ra80

|       |     |                                                                                                                                                                                                           |      |         |       |
|-------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|-------|
| 090   | --- | 904 lm                                                                                                                                                                                                    | 6.2W | 145lm/W | 180mA |
| 100   | --- | 1084 lm                                                                                                                                                                                                   | 7.8W | 128lm/W | 220mA |
| 2700K | 2   | <ul style="list-style-type: none"> <li>0 No Emergency</li> <li>E Maintained Emergency</li> <li>1 1-10V</li> <li>5 DALI</li> <li>7 Lead / Trailing</li> <li>9 Addressable Inverter &amp; Driver</li> </ul> |      |         |       |
| 3000K | 3   |                                                                                                                                                                                                           |      |         |       |
| 4000K | 5   |                                                                                                                                                                                                           |      |         |       |

Please note, different colour appearances (K) of LEDs have slightly different lumens outputs, so, using various manufacturers figures DAL quotes mean average lumens for L and C products.

