





MINITRIM 62 WALLWASHER - CITIZEN LED

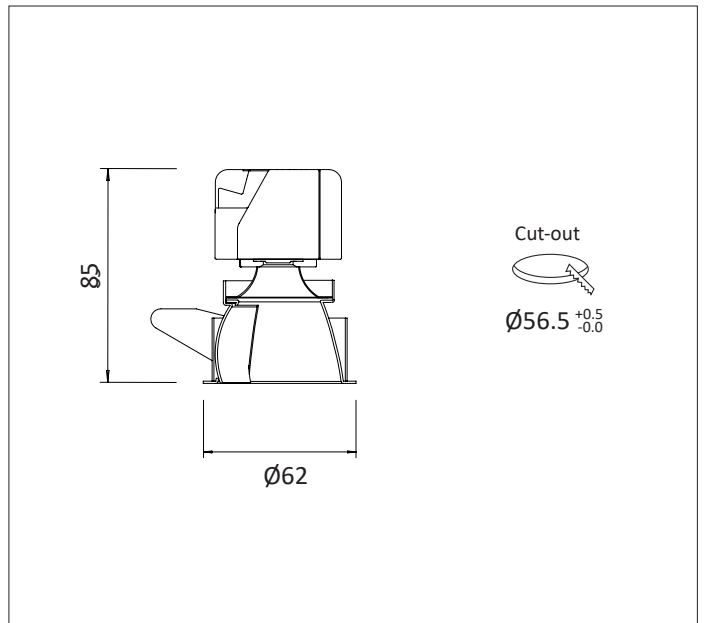


MINITRIM 62 FIXED WALLWASHER Round recessed, kick reflector, with no separate ceiling trim. The high-quality precision light controller with lens plus deep cone aluminium reflector gives visual comfort. Kick reflector wallwashing re-directs light up the wall or vertical surface. The MINITRIM 62 Wallwasher is easy to install and incorporates the latest, high efficiency LED technology. Colour consistency through life is ensured by state-of-the-art components and passive cooling aluminium heat sinks. Standard colour temperatures: 2700K, 3000K, 4000K, colour rendering Ra >80 and >90 2-3 step Macadam are all available. Life 50000 hours. A choice of drivers provide fixed supply or dimming to project requirements. IP20, high specification diecast construction, colour powder coat finish provides longevity. Built to conform to the requirements of BS EN 60598-1 and IEC 598. The MINITRIM 62 spring mechanism makes installation easy. Photometrically tested to LM-79-08 confirms MINITRIMs high performance.

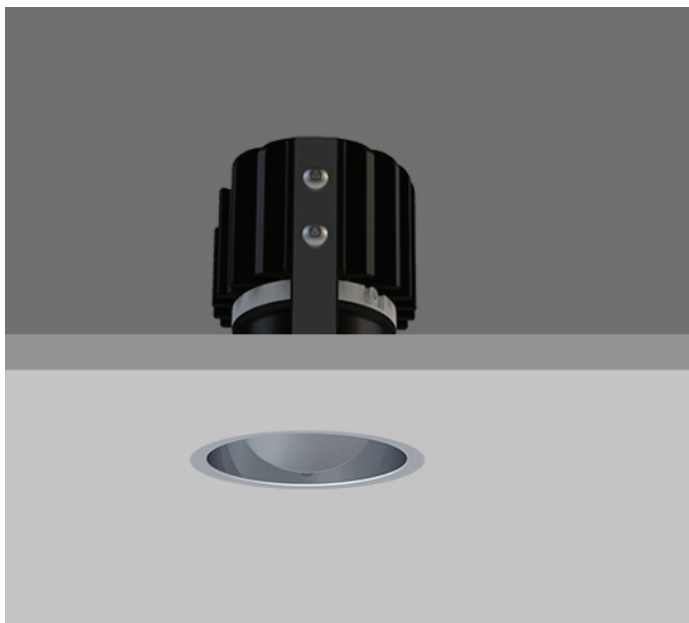


Spectro
Silver

IP20

Asym-
metric **F8807**





Engine Order Code	Output (Lumens)	CCT	CRI	Pd (W)	VF forward	Current
10F2	1000	2700K	>80	6.5W	32	200 mA
13F2	1300	2700K	>80	8.3W	33	250 mA

10F3	1000	3000K	>80	6.5W	32	200 mA
13F3	1300	3000K	>80	8.3W	33	250 mA

10F5	1000	4000K	>80	6.5W	32	200 mA
13F5	1300	4000K	>80	8.3W	33	250 mA


Engine Order Code	Output (Lumens)	CCT	CRI	Pd (W)	VF forward	Current
10G2	1000	2700K	>90	8.3W	33	250 mA
13G2	1300	2700K	>90	10.8W	34	300 mA

10G3	1000	3000K	>90	8.3W	33	250 mA
13G3	1300	3000K	>90	10.8W	34	300 mA

10G5	1000	4000K	>90	8.3W	33	250 mA
13G5	1300	4000K	>90	10.8W	34	300 mA

Tolerance range for optical and electrical data: ±10 %.




DRIVERS & EMERGENCY



Driver Order Code	Lumens	Make	Type	Max Output	Voltage Range	Dimming Range	Current Range	DAL Part No
0	FIXED							
1	1-10V							
3	DSI							
5	DALI							
7	LEAD / TRAIL							

Emergency Order Code	Description	Output (Lumens)	Emergency Operation (Lumens)	DAL Part No
0	No emergency			
E	3 hour maintained emergency pack			
9E	with DALI Addressable with full error feed back			

PHOTOMETRIC DATA

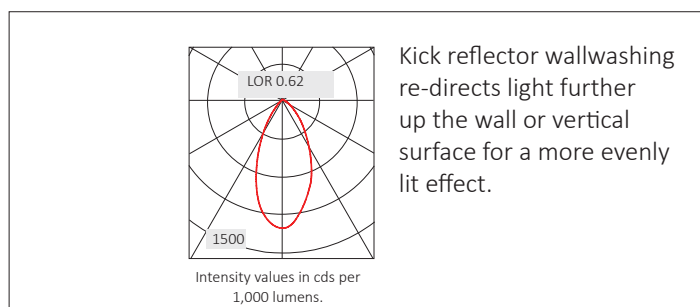

Full Product Number Example

F860113F290

F86 Minitrim 62 Wallwasher Citizen LED - IP20

0 Asymmetric

8 Spectro Silver

13 1300

F CRI >80 - 3 Step MacAdam

2 2700K

9 Addressable

0 No Emergency