




# COVELINE LED

COVELINE LED can be surface mounted or neatly recessed. It consists of an aluminium extruded profile constructed as individual modules in various chassis lengths, which come complete with remote driver. Optical control is provided by a clip in opal diffuser.

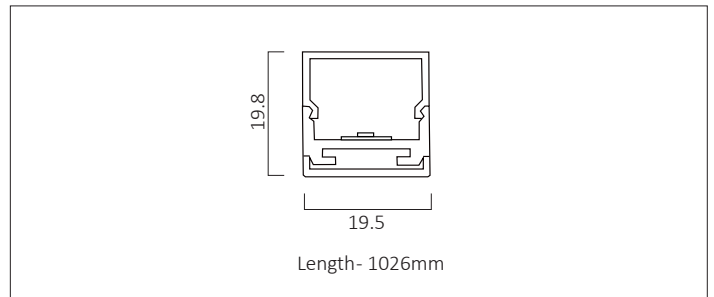

|                |  |
|----------------|--|
| Product Number | L4506                                    |
| Lamp Type      | LED, 1550 lumens, 4000K, Ra>80,<br>11.3W |
| Construction   | Aluminium / Steel / Plastic              |
| Diffuser       | Opal                                     |
| Finish         | Anodized Silver                          |
| IP             | IP44                                     |
| Control        | Driver                                   |

COVELINE LED is primarily a bespoke system, it will be necessary to discuss each project's specific requirements to ensure the correct specification.