


# AMBIANCE X100 LENS WALLWASHER - Xicato LED






AMBIANCE X100 LENS WALLWASHER Round recessed wallwasher with standard white ceiling trim and a choice of deep cone reflector finish and spread lens. The AMBIANCE X100 LENS WALLWASHER is easy to install and incorporates the latest, high efficiency LED technology. Colour consistency through life is ensured by state-of-the-art components and passive cooling aluminium heat sinks.


Standard colour temperatures: 2700K, 3000K, 4000K, colour rendering Ra >80 2 step Macadam are all available.

Life 50000 hours. A choice of drivers provide fixed supply or dimming to project requirements. IP20 or IP44 durable, high specification diecast construction, colour powder coat finish provides longevity.

Built to conform to the requirements of BS EN 60598-1 and IEC 598. The AMBIANCE X100 LENS WALLWASHER spring mechanism makes installation easy. Photometrically tested to LM-79-08 confirms AMBIANCE X100 LENS WALLWASHER performance.

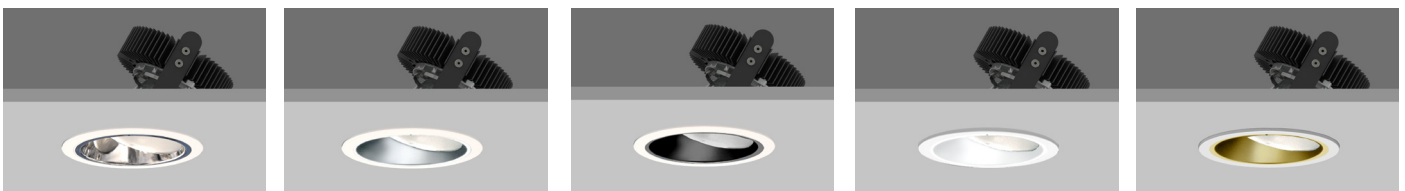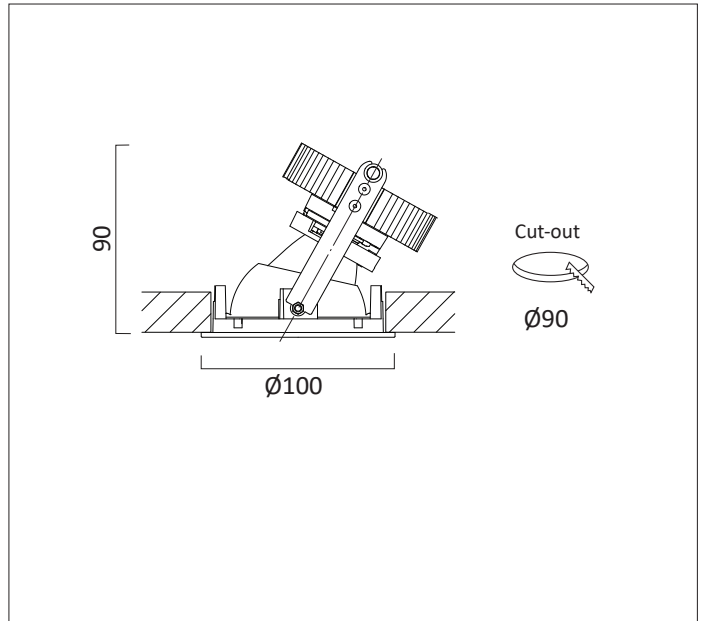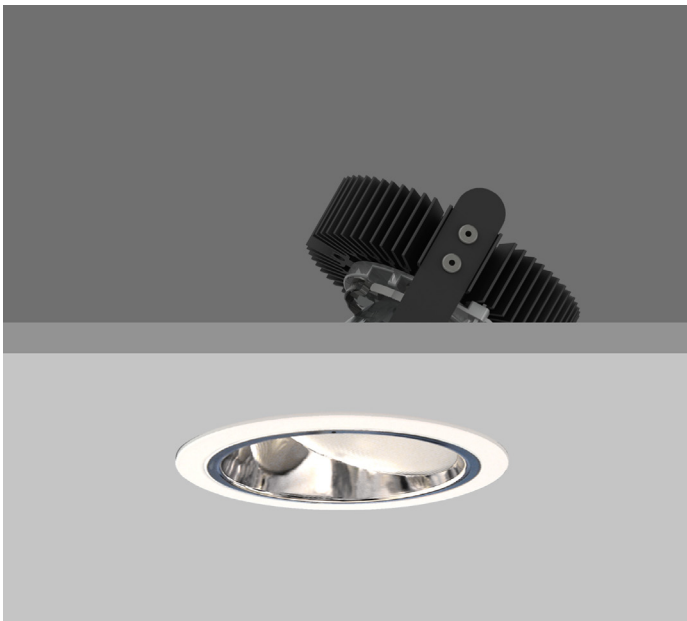

	Specular Silver	Satin Silver	Black	White	Gold
IP20	<b>C0701</b>	<b>C0702</b>	<b>C0703</b>	<b>C0704</b>	<b>C0705</b>




**19mm LIGHT ENGINE**

Engine Order Code	Output (Lumens)	CCT	CRI	Pd (W)	Vf forward typical	Current
<b>09A2</b>	965	2700K	>80	6.6W	13.2	500 mA
<b>13A2</b>	1300	2700K	>80	9.5W	13.6	700 mA
<b>14A2</b>	1490	2700K	>80	10.6W	21.1	500 mA
<b>20A2</b>	2000	2700K	>80	15.2W	21.7	700 mA
<b>09A3</b>	965	3000K	>80	6.6W	13.2	500 mA
<b>13A3</b>	1300	3000K	>80	9.5W	13.6	700 mA
<b>14A3</b>	1490	3000K	>80	10.6W	21.1	500 mA
<b>20A3</b>	2000	3000K	>80	15.2W	21.7	700 mA
<b>09A5</b>	965	4000K	>80	6.6W	13.2	500 mA
<b>13A5</b>	1300	4000K	>80	9.5W	13.6	700 mA
<b>14A5</b>	1490	4000K	>80	10.6W	21.1	500 mA
<b>20A5</b>	2000	4000K	>80	15.2W	21.7	700 mA

Tolerance range for optical and electrical data:  $\pm 10\%$ .


# DRIVERS & EMERGENCY



Driver Order Code	Lumens	Make	Type	Max Output	Voltage Range	Dimming Range	Current Range	DAL Part No
<b>0</b>	FIXED							
<b>1</b>	1-10V							
<b>3</b>	DSI							
<b>5</b>	DALI							
<b>7</b>	LEAD / TRAIL							

Emergency Order Code	Description	Output (Lumens)	Emergency Operation (Lumens)	DAL Part No
<b>0</b>	No emergency			
<b>E</b>	3 hour maintained emergency pack			
<b>9E</b>	with DALI Addressable with full error feed back			

# PHOTOMETRIC DATA

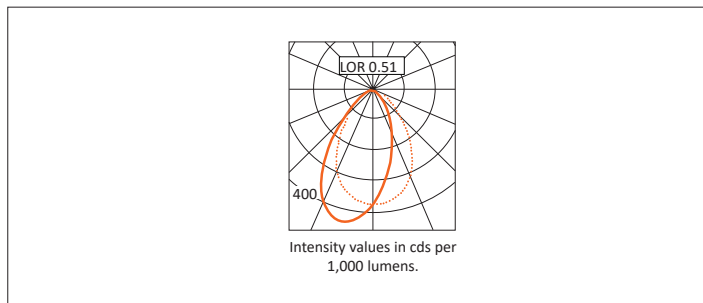

Full Product Number Example

**C0702113A290**

**C07** Xicato LED- IP20

**0** Wallwash

**1** Specular Silver

**13** 1300

**A** CRI >80 - 2 Step MacAdam

**2** 2700K

**9** Addressable Driver

**0** No Emergency