



## LINEAR DECO 68


With an opal diffuser inside a linear reeded glass to provide a uniform distribution and a decorative feature, the DECO TUBE 68 is a surface-mounted luminaire. It is made of premium extruded aluminium and steel with a long-lasting painted bronze finish.

Its visually pleasing look makes it appropriate for wall or ceiling mounting, and is available in various lengths and outputs which make it suitable for both large and small areas..

It has outstanding colour consistency, high efficiency, and the latest high power LED technology. Its internal driver and passive cooling gear trays are features. Simple to install. Future-proof, maintained LEDs and drivers are accessible for maintenance.

Standard colour temperatures: 2700K, 3000K, 4000K colour rendering Ra >90 3 step Macadam. Life 50000 hours. Available with fixed non dimmable driver or Lead-Trailing/DALI / 1-10V dimmable driver. IP20 construction. Built to conform to the requirements of BS EN 60598-1 and IEC 598.



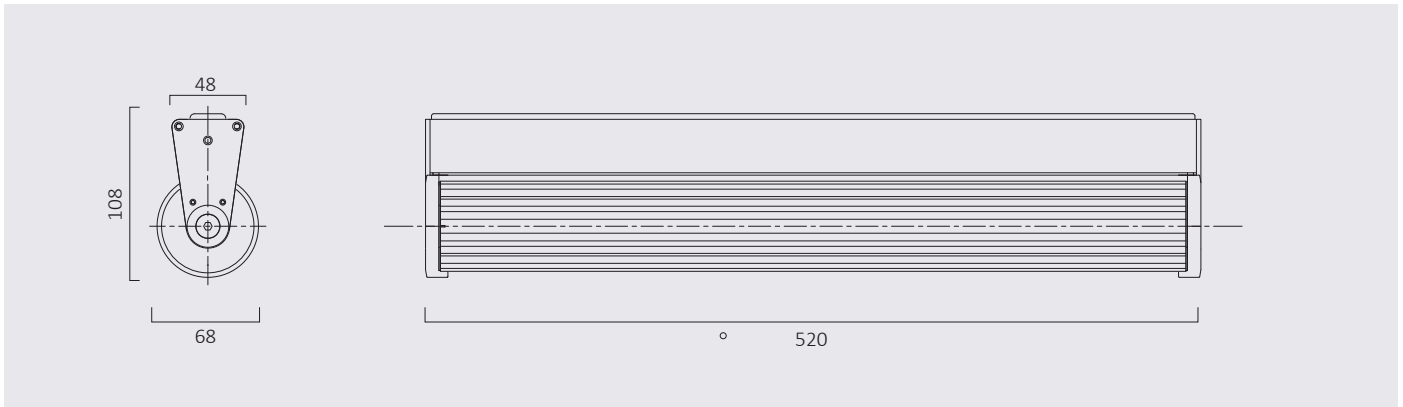

Product No	Diffuser Distribution	Overall Length	CCT	CRI	Typical Delivered Lumens	Watts
<b>A8115/927</b>	<b>Opal / Reeded Linear</b>	520mm	2700 K	90	1400 lms	21 W
<b>A8115/930</b>	<b>Opal / Reeded Linear</b>	520mm	3000 K	90	1400 lms	21 W
<b>A8115/940</b>	<b>Opal / Reeded Linear</b>	520mm	4000 K	90	1400 lms	21 W

Light Source:	High quality LEDs	Standard Painted Finish:	Bronze
Colour Rendering:	Excellent CRI > 90 (other CRI available on request).	Optical Performance:	Engineered diffuser controls the distribution resulting in an even distribution and appearance.
Colour Temp:	2700, 3000K or 4000K (other CCT available on request).	Construction:	IP20 (dry interior use).
Longevity:	50,000 hrs (min)	Electrical Supply:	230v 50/60Hz
Light Control:	Fixed (Non Dimmable), Lead-Trailing DALI or 1-10V Dimmable Driver standard		
Construction:	Extruded aluminium construction.		

