
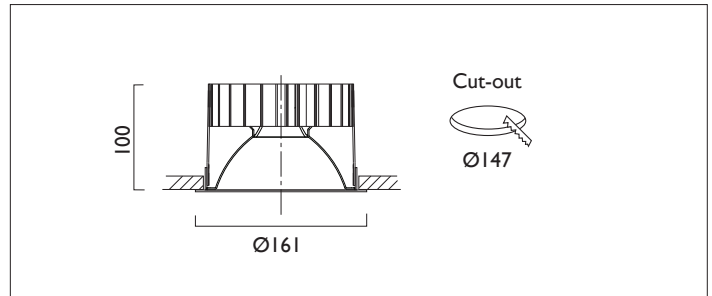


# TEMPO X161 IP44

TEMPO X161 with Xicato LED recessed downlighter with cone reflector finished in white, clear glass cover and white ceiling trim. Overall diameter 161mm, cut out 147mm.

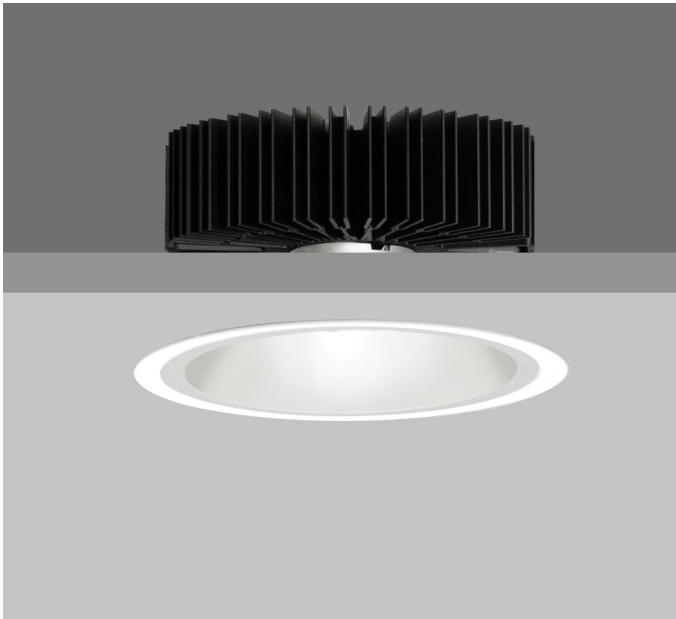

|                |                               |
|----------------|-------------------------------|
| Product Number | C7224/*Engine                 |
| Lamp Type      | Xicato LED, Up to 2000 lumens |
| Reflector      | White                         |
| Beam Angle     | 20°                           |
| Construction   | Aluminium / Steel / Glass     |
| Ceiling Trim   | White RAL 9010                |
| IP             | IP44                          |
| Control        | Driver                        |

\*Please refer to Engine Specification Page

| *Light Engine Specification      |     |         |       |                      |
|----------------------------------|-----|---------|-------|----------------------|
| Xicato XTM L80 50,000 hours Ra80 |     |         |       |                      |
| 11A                              | --- | 1105 lm | 9.3W  | 119lm/w 350mA        |
| 14A                              | --- | 1490 lm | 13.6W | 110 lm/w 500mA       |
| 20A                              | --- | 2000 lm | 19.5W | 102 lm/w 700mA       |
| 30A                              | --- | 3000 lm | 29.3W | 102m/w 1050mA        |
| 2700K                            | 2   |         |       |                      |
| 3000K                            | 3   |         |       |                      |
| 3500K                            | 4   |         |       |                      |
| 4000K                            | 5   |         |       |                      |
|                                  |     |         | 0     | No Emergency         |
|                                  |     |         | E     | Maintained Emergency |
|                                  |     |         | 0     | Fixed Output         |
|                                  |     |         | 1     | I-10V                |
|                                  |     |         | 3     | DSI                  |
|                                  |     |         | 5     | DALI                 |
|                                  |     |         | 7     | Lead / Trailing      |
|                                  |     |         | 9     | Addressable          |

